


Protective hose | STT

Hose for standard applications | Mechanical Engineering / Automation / Energy / Construction / Railway / Marine | PA6 | UL94 V2 heavy

Article:	Speech-to-text
Brand:	Interflex
Material:	Polyamide PA6
Flammability:	UL94 V2 heavy
UL94 V2 heavy	-40°C to 105°C (150°C short time)
Color:	Black
Other:	Halogen-free, phosphorus-free, and cadmium-free. Non-flame propagating.

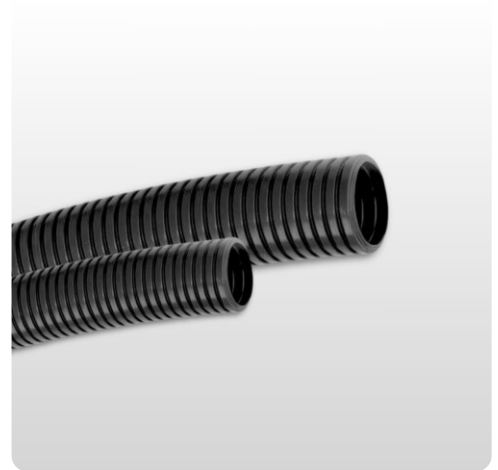

Description

Flexible Protective Hose / STT is made of PA6 and is perfect for standard installations. STT has a special patented profile for the ORJ o-ring to provide a higher IP class.

Well suited for standard applications in:

- Machine building
- Automation & Robotics
- Renewable energy installations
- Construction
- Railway industry
- Maritime



Article number

Art.No	Description	ND Ø mm	Internal Ø mm	External Ø mm	Material	Color	Unit	Mr./Ms. roll
STT-07N	Protective hose STT PA6	7	6.2	10	Polyamide 6	Black	roll	50
STT-10N	Protective hose STT PA6	10	9.6	13	Polyamide 6	Black	roll	50
STT-12N	Protective hose STT PA6	12	12	15.8	Polyamide 6	Black	roll	50
STT-17N	Protective hose STT PA6	17	16.5	21.2	Polyamide 6	Black	roll	50
STT-23N	Protective hose STT PA6	23	22.3	28.5	Polyamide 6	Black	roll	50
STT-29N	Protective hose STT PA6	29	28.2	34.5	Polyamide 6	Black	roll	50
STT-36N	Protective hose STT PA6	36	36	42.5	Polyamide 6	Black	roll	30
STT-48N	Protective hose STT PA6	48	47.1	54.5	Polyamide 6	Black	roll	30