


EMC shielding clamps on ground strap | MB/MSKL

Potential equalization

| | |
|------------------------|--------------------------------|
| Article: | MB/MSKL |
| Brand: | icotek |
| Screen clamp material: | Spring steel, galvanized |
| Basramen material: | Copper, tinned |
| Mounting options: | Screw assembly, Rivet assembly |
| Mounting location: | Metal sheets |

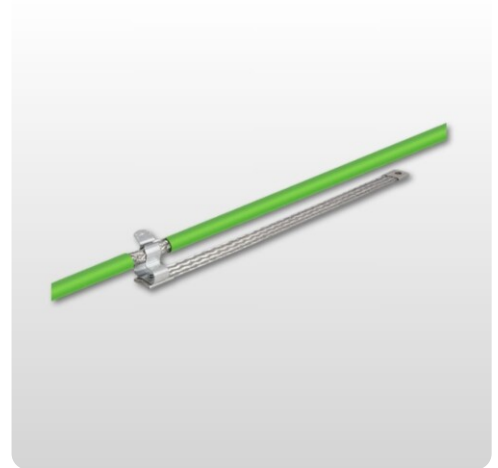

Description

The grounding straps are equipped with a shield clamp at one end. This solution is used where space is limited.

The grounding lugs are available with M4 or M6 holes

Advantages

- Very flexible mounting
- Installation also in hard-to-reach places
- Grounding tape with pressed connection end pads
- Standard products, short delivery times
- UL listed



Article number

| Art.No | Description | Length mm | Width mm | Height mm | Hole size | Cross-section | Current load | My cable shield diameter | Maximum cable shield diameter | Unit | Pc |
|----------|-------------------------------|-----------|----------|-----------|-----------|-------------------------|--------------|--------------------------|-------------------------------|------|----|
| 32695.01 | MB 100 6 M4 SK ULL 3-12 | 113 | 14.9 | 25 | M4 | 6 square millimeters | 67-80 A | 3 mm | 12 mm | st | 10 |
| 32695.02 | MB 100 6 M4 MS KL 8-18 | 113 | 19.7 | 31.2 | M4 | 6 square millimeters | 67-80 A | 8 millimeters | 18 mm | st | 10 |
| 39711.01 | MB 100 10 M6+M 4 MSKL 3-12 | 120 | 14.9 | 25 | M6 | 10 mm ² | 89-106 A | 3 mm | 12 mm | st | 10 |
| 39711.02 | MB 100 10 M6+M 4 MSKL 8-18 | 120 | 19.7 | 31.2 | M6 | 10 mm ² | 89-106 A | 8 millimeters | 18 mm | st | 10 |
| 39710.01 | MB 150 6 M4 MS KL 3-12 | 163 | 14.9 | 25 | M4 | 6 square millimeters | 67-80 A | 3 mm | 12 mm | st | 10 |
| 39710.02 | MB 150 6 M4 MU SCLE 8-18 | 163 | 19.7 | 31.2 | M4 | 6 square millimeters | 67-80 A | 8 millimeters | 18 mm | st | 10 |
| 32707.01 | MB 200 6 M4 MS KL 3-12 | 213 | 14.9 | 25 | M4 | 6 square millimeters | 67-80 A | 3 mm | 12 mm | st | 10 |
| 32707.02 | MB 200 6 M4 MS KL 8-18 | 213 | 19.7 | 31.2 | M4 | 6 square millimeters | 67-80 A | 8 millimeters | 18 mm | st | 10 |