


## Cable glands | DT Polyamide


Standard cable gland with double seal | M16 - M32 | Clamping radius Ø3-25mm | RAL7035 | IP68

|                             |                                 |
|-----------------------------|---------------------------------|
| Article:                    | Cable glands   DT Polyamide     |
| Brand:                      | Bimed                           |
| Cable Gland Material:       | Polyamide PA6                   |
| Material Seal around cable: | Chloroprene CR                  |
| Protection class:           | IP 68 - 5 Bar, 30 minutes, IP66 |
| Type Rating:                | TYPE1, 4X                       |
| Flammability:               | V2 according to UL94            |
| Operating temperature:      | Permanent -20 °C to +100 °C     |
| Thread type:                | Metric                          |
| Certificate:                | CE, VDE, CSA, UL, UR, DNV       |

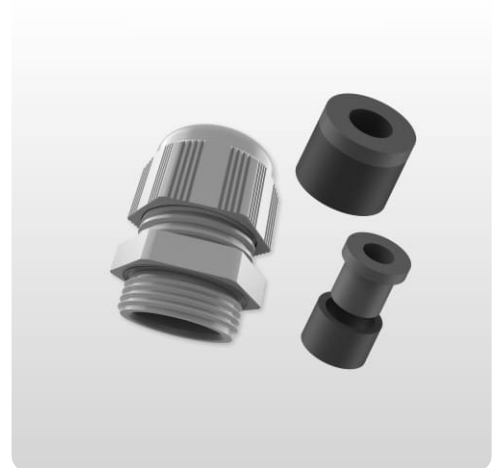

### Description

Cable glands DT Polyamid is a gland with double seal. These cable glands are manufactured with two nested seals which enables reliable sealing for a wider variety of cable diameters. With proven sealing technology and international approvals, you can be sure that these cable glands meet the highest standards. Whether it's heavy industry or other demanding applications, these polyamide cable glands are a reliable choice for your needs.



- For standard industrial applications
- UL and VDE certified along with various other approvals - see technical data for full details
- Fast and easy mounting
- High quality strain relief and sealing, reliable performance for standard industrial applications
- Current international approvals

## Article number

| Art.No        | Description         | Size    | Cable diameter Ø mm | Thread Length TL mm | Height H mm | Protection class | Color   |
|---------------|---------------------|---------|---------------------|---------------------|-------------|------------------|---------|
| CBM-EN-11-DS  | Cable gland DT   PA | M16x1.5 | 3 – 8               | 8                   | 27.4        | IP68             | RAL7035 |
| CBM-11-DS     | Cable gland DT   PA | M16x1.5 | 3 – 10              | 10                  | 32.2        | IP68             | RAL7035 |
| CBM-EN-12S-DS | Cable gland DT   PA | M20x1.5 | 3 – 13              | 10                  | 34          | IP68             | RAL7035 |
| CBM-12-DS     | Cable gland DT   PA | M20x1.5 | 5 – 12              | 10                  | 32.4        | IP68             | RAL7035 |
| CBM-13-DS     | Cable gland DT   PA | M20x1.5 | 7 – 14              | 10                  | 31.9        | IP68             | RAL7035 |
| CBM-EN-13-DS  | Cable gland DT   PA | M25x1.5 | 8 – 17              | 10                  | 37.7        | IP68             | RAL7035 |
| CBM-15-DS     | Cable gland DT   PA | M32x1.5 | 9 – 18              | 10                  | 38.4        | IP68             | RAL7035 |
| CBM-EN-14-DS  | Cable gland DT   PA | M32x1.5 | 11 – 21             | 10                  | 42.3        | IP68             | RAL7035 |
| CBM-17-DS     | Cable gland DT   PA | M32x1.5 | 13 – 25             | 15                  | 43.3        | IP68             | RAL7035 |