


Protective hose | VOT

Hose for applications with fire & smoke requirements | Automation / Railway / Construction / Marine | PA6 | UL94 V0 medium

Article:	VOT
Brand:	Interflex
Material:	Polyamide PA6
Flammability:	UL94 V0 medium
Temperature:	-40°C to 105°C (150°C short term)
Color:	Black I2F2
Other:	Free from halogen, phosphorus and cadmium. Non-flame propagator

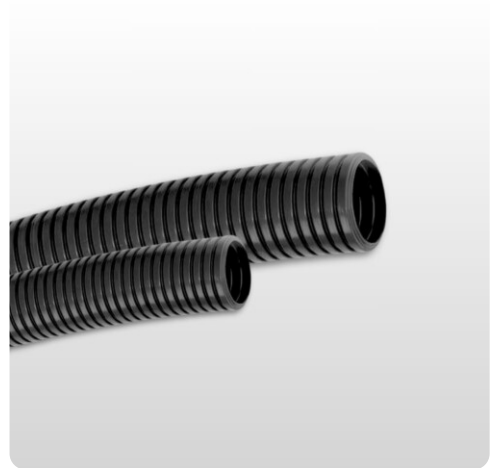

Description

Protective tubing / VOT for insulation and mechanical protection of cables in electrical installations. Particularly suitable for installations and applications in passenger areas for example railway buses, railway tunnels, metro stations and general installations with special fire and smoke requirements.

VOT has a special patented profile for the / ORJ o-ring to provide a higher IP class.

Suitable for applications with fire and smoke requirements within:

- Automation & Robotics
- Railway industry
- Construction
- Maritime



Article number

Art.No	Description	ND Ø mm	Internal Ø mm	External Ø mm	Meters	Color	Material
VOT-07N	Protective hose VOT PA6	7	6.4	10	50	Black	Polyamide 6
VOT-10N	Protective hose VOT PA6	10	9.8	13	50	Black	Polyamide 6
VOT-12N	Protective hose VOT PA6	12	12.3	15.8	50	Black	Polyamide 6
VOT-17N	Protective hose VOT PA6	17	16.9	21.2	50	Black	Polyamide 6
VOT-23N	Protective hose VOT PA6	23	22.7	28.5	50	Black	Polyamide 6
VOT-29N	Protective hose VOT PA6	29	28.4	34.5	50	Black	Polyamide 6
VOT-36N	Protective hose VOT PA6	36	36.4	42.5	30	Black	Polyamide 6
VOT-48N	Protective hose VOT PA6	48	47.5	54.5	30	Black	Polyamide 6