


## Cable gland 90° | KEL-FG

Split enclosure | for cables with connector | IP54

Article:	KEL-FG
Brand:	icotek
IP rating:	IP54
UL Type:	UL Type 12
Flammability:	UL94-V0, self-extinguishing
Temperature:	40°C to 140°C
Material:	Polyamide
Mounting options:	Screw mounting, Snap-in with KEL-SNAP
Characteristics:	Vibration-proof, Silicone-free, Anti-corrosive (V2A versions), Halogen-free

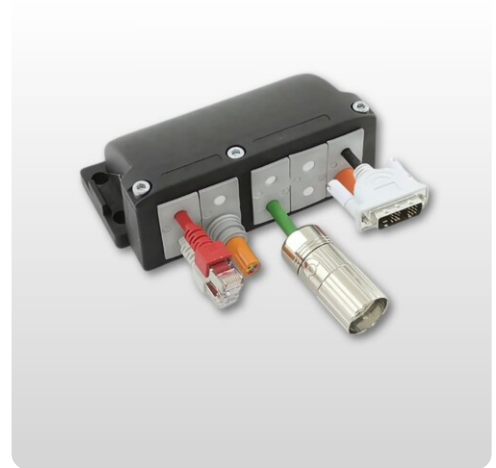

### Description

The KEL-FG cable gland is suitable for sealing, strain relief and installation of cables with connectors and wires at a 90° angle to machine walls, enclosures or cabinets.

KEL-FG-A frame has exactly the right hole size for 24-pin standard industrial connectors. The KEL-FG-B frame has the exact hole size of 36x46mm.

KEL-FG-E version Especially suitable for flat contacts. The small frame can be used perfectly in limited space.

- The shipment includes a flat rubber gasket

#### Advantages:

- Installation 90° from wall
- Mechanical protection for cables directly at the entrance
- Warranties on pre-connected cables are maintained
- Strain relief according to EN 62444
- High stability, vibration resistant



## Article number

Art.No	Description	Number of Cables	Maximum cable diameter	Length mm	Width mm	Height mm	Mounting height	Punching	Suitable for interventions	Unit	Pc
42197	Gasket E3			98	40	2.5	2.5	65 x 24		st	1
42246	Gasket 24			145	56	2.5	2.5	112 x 36		st	1
42251	Gasket E5			147	40	2.5	2.5	112 x 24		st	1
42256	Gasket E2			72.8	40	2.5	2.5	43 x 24		st	1
42320	KEL-FG A10	40	17	147	80	57.5	57.5	112 x 36	10 x KT small	st	1
42320.200	KEL-FG A10 V2A	40	17	147	80	57.5	57.5	112 x 36	10 x KT small	st	1
42322	KEL-FG A7	25	35	147	80	57.5	57.5	112 x 36	6 x Small KT + 1 x Large KT	st	1
42322.200	KEL-FG A7 V2A	25	35	147	80	57.5	57.5	112 x 36	6 x Small KT + 1 x Large KT	st	1
42324	KEL-FG A4	10	35	147	80	57.5	57.5	112 x 36	2 x KT small + 2 x KT large	st	1
42324.200	KEL-FG A4 V2A	10	35	147	80	57.5	57.5	112 x 36	2 x KT small + 2 x KT large	st	1
42330	KEL-FG B4	16	17	79.8	80	57.5	57.5	36 x 46	4 x KT small	st	1
42330.200	KEL-FG B4 V2A	16	17	79.8	80	57.5	57.5	36 x 46	4 x KT small	st	1
42331	Gasket FG-B			72.85	55.6	2.5	2.5	46 x 46		st	1
42332	KEL-FG B1	1	35	79.8	80	57.5	57.5	36 x 46	1 x KT large	st	1
42332.200	KEL-FG B1 V2A	1	35	79.8	80	57.5	57.5	36 x 46	1 x KT large	st	1
42333	KEL-FG	8	17	73	53	38	38	43 x 24	2 x KT small	st	5
42333.200	KEL-FG E2 V2A	8	17	73	53	38	38	43 x 24	2 x KT small	st	5
42334	KEL-FG E3	12	17	100	53	38	38	65 x 24	3 x small KT	st	5

## Article number

42334.200	KEL-FG E3 V2A	12	17	100	53	38	38	65 x 24	3 x small KT	st	5
42336	KEL-FG E5	20	17	147	53	38	38	112 x 24	5 x KT small	st	5
42336.200	KEL-FG E5 V2A	20	17	147	53	38	38	112 x 24	5 x KT small	st	5