


## Cable entry pyramid | KEL-JUMBO flex

Pipes up to Ø68mm | IP54 | UL Type 12

Article:	KEL-JUMBO flex
Brand:	icotek
Protection class:	IP54
UL Type:	UL Type 12
Flammability:	UL94-V0, self-extinguishing
Temperature:	-40°C to 100°C
Material:	Elastomer
Material Base frame:	Polyamide
Mounting options:	Screw mounting
Characteristics:	Silicone-free, Halogen-free

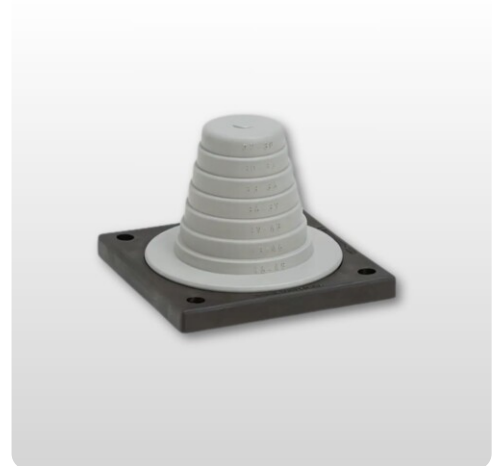

### Description

Cable entry grommet pyramid / KEL-JUMBO flex is a flexible cable entry for cables without connectors with a diameter range from 27 - 68 mm. They are ideal for the supply cables into electrical cabinets.

Cutting KEL-JUMBO flex grommet:

- Cable diameter < 25%
- The corresponding diameters are marked on the grommet
- It is recommended that additional strain relief be provided for cables as part of the installation

Advantages:

- Fast assembly
- The grommet allows dynamic and flexible movement of rigid cables
- Compact installation area (88 x 88 mm)



## Article number

Art.No	Description	Length mm	Width mm	Height mm	Drilling etc.	Cable. mm	Unit	Pc
42614	KEL-JUMBO flex	88	88	62	57.6	1x27-48	st	1
42616	KEL-JUMBO flex	88	88	62	75.5	1x47-68	st	1