


## Distribution Box 360° | DB

Splittable box | for cables with or without connector | M32 - M75 | IP54

Article:	DB
Brand:	icotek
Protection class	IP54
Temperature:	-40°C to 140°C
Material:	Polyamide
Mounting options:	Secure with locknut
Characteristics:	Vibration-proof, Silicone-free, Halogen-free

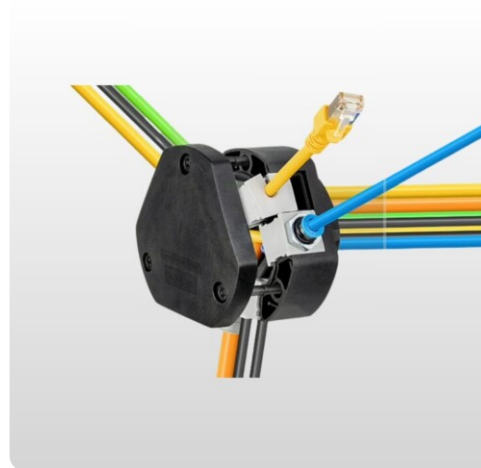

### Description

With Distribution Box 360° / DB can distribute bundled cables (with or without connectors) and route them 360° in all directions. Cables (with or without connectors) and with a diameter of 1 to 15 mm can be routed, sealed and provided with strain relief according to EN 62444. The Distribution Box 360° is suitable for metric holes M32-M75 and can be fixed with a lock nut, which is included in the delivery. Up to 48 possible positions and thus high cable density through multi-inserts. Thanks to the simple screw mounting and the use of divisible inserts, re-installations, repairs and maintenance can be handled very easily and smoothly.

### Advantages:

- Fast and easy to assemble
- Easy distribution of cables in a 360° angle
- Warranty on pre-terminated cables remains
- Re-installations, repairs, and maintenance can be handled very easily and smoothly.
- Suitable for metric cut-outs M32 – M75
- Strain relief according to EN 62444
- Use of the proven KT grommet system
- High cable density, wide variety of grommets
- High flexibility with the use of multi-range and IMAS-CONNECT™ adapter grommets
- Hexagonal locknut included in the delivery
- High stability, vibration resistant
- Mechanical protection of the central entry point



Article number

No product found.